



Anti-Corrosion • Anti-Rust • Anti-Mold & Mildew

# Intercept Technology™

Stop Corrosion Before it Starts

## Intercept Technology™ Fabric

Made in  
U.S.A




### The Ultimate Re-Usable Outdoor Cover

**The Perfect Solution.** Intercept fabric is the next generation of long-term industrial protection, specifically designed to protect your assets before they can be attacked or degraded by destructive corrosion, rust, oxidation, mold or mildew. Works with all metals

**Intercept simply works better, without vapors or volatiles**

#### Companies Rely on Proven Protection

- Re-usability saving time and money
- Custom designs ensuring covers and bags fit right the first time.
- Pattern making, sewing in Texas.




#### Long Term Storage (Mothballing)

- Completely encase items or equipment for long term storage.
- No need to apply messy oils or sprays
- Keeps item in the same condition as it went in
- Size and complexity are not an issue
- Can be stored indoors or outdoors

#### Warehouse in a Bag

- Re-usable outdoor storage cover
- Designed with zipper access doors for easy periodic inspections
- Installed and removed in minutes
- Temperature range -42°F to 165°F
- Effective in harsh environments

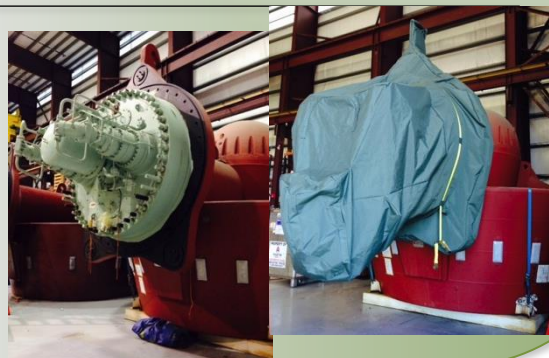

Learn More: [www.InterceptShrinkFilm.com](http://www.InterceptShrinkFilm.com) or [www.InterceptTechnology.com](http://www.InterceptTechnology.com)





Anti-Corrosion • Anti-Rust • Anti-Mold & Mildew

# Intercept Technology™

Stop Corrosion Before it Starts

© FPM 2015



- Indoor, outdoor and harsh environment storage
- Designed to meet customer requirements
- Functional and fast return on investment
- Can be re-opened and easily re-used / Versatile
- Complex designs are not a problem / On site work



## Specifications

Gauge: 20 mils total

	<u>Warp</u>	<u>Fill</u>	<u>Test</u>
Elongation (%)	20.5	21.5	ASTM D5035-95
Tear (Trapezoidal)	59	34.2	ASTM D1117-95
Tensile (Strip – lbf)	144	89.6	ASTM D5035-95
Tensile (grab - lbf)	189.6	188.5	ASTM D5034-95
Abrasion Resistance (CS 10/500 cycles)	Pass		ASTM D3884-92


Flammability (outer fabric) Pass CS-191-53/CA 117E  
Outgassing

Total Mass Loss	0.02%	ASTM E595
Volatile Condense	0.002%	NASA SP-R-0022A

Polycarbonate

compatibility	Pass	EIA 564
Corrosion Steel	Pass	Military testing
Al and Cu	Pass	

**USMC Mobile Maintenance Facility Anti-Corrosion Covers w/ Intercept Fabric**

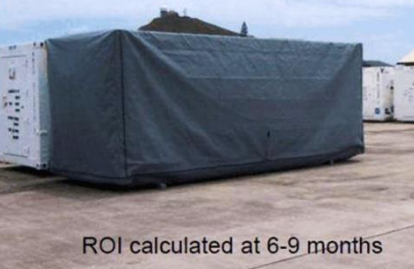

ROI calculated at 6-9 months

Intercept Authorized Company: FPM [www.InterceptShrinkFilm.com](http://www.InterceptShrinkFilm.com)